STEEL WIRE ROPE

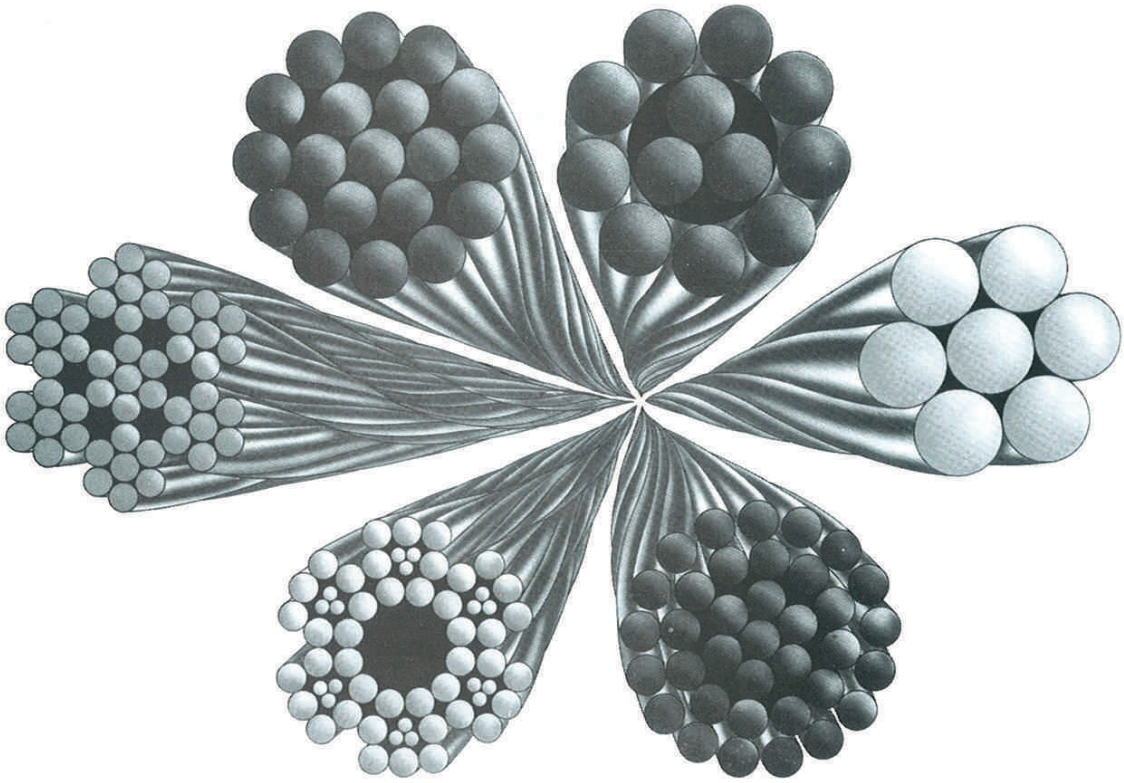

Component Parts of Wire Rope

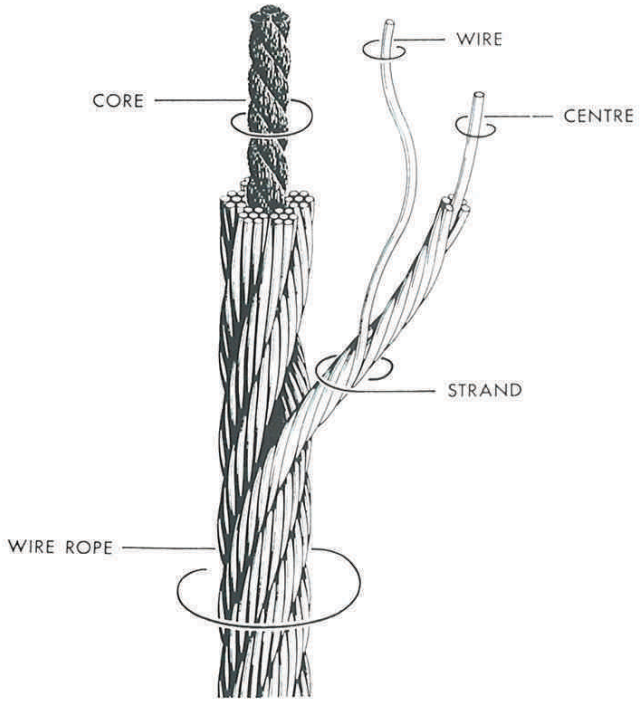

Ropes available in various diameters, constructions and finishes.

Manufactured to various international standards.

See overleaf

1 x 19 (12/6/1)
galvanised and stainless steel,
1770 MPa

Control cables,
general engineering

6 x 36 (14/7+7/7/1) fibre core,
galvanised and ungalvanised,
1770 and 1960 MPa

Mining, slings,
general engineering,
winches, hoists,
cranes



6 x 36 (14/7+7/7/1)
IWRC galvanised and ungalvanised,
1770 and 1960 MPa

Mining, slings,
general engineering,
winches, hoists,
cranes



18 x 7 - 12 x 7 (6/1)/6 x 7(6/1) fibre core and
19 x 7 - 12 x 7 (6/1)/6 x 7(6/1)/1 x 7 (6 x 1)
non-spin,
ungalvanised,
1770 and
1960MPa

Cranes, general
engineering, drilling,
non-spin applications

6 x 19 (12/6/1) fibre core,
galvanised, 1770 MPa

Mining, slings,
general engineering,
drilling

6 x 7(6/1)
fibre core,
galvanised,
1770 MPa

General purpose,
where less flexibility
is required



6 x 7 (6/1)
fibre core,
galvanised,
1770 MPa,
PVC covered

General purpose and
bell-wire applications

6 x 12 (12/fc)
fibre core,
galvanised,

General engineering,
lashing, blasting barricades



7 x 7 (6/1)
stainless,
grade 304
and 316,
and galvanised



7 x 19 (12/6/1)
stainless
grade 304
and 316

For use with stainless steel and
copper fittings, where rust prevention
is essential

— ENQUIRE ABOUT OUR RANGE OF 8x19, 8x26 AND 35x7 COMPACTED STRANDS,
2160MPa HIGH PERFORMANCE ROPES —